



Shielded Power Inductors – MSS6122



- 6.1 × 6.1 mm footprint; 2.2 mm high shielded inductors
- Low DCR and excellent current handling

Designer's Kit C363 contains 3 of each value

Core material Ferrite

Core and winding loss See www.coilcraft.com/coreloss

Terminations RoHS compliant matte tin over nickel over phos bronze (current production) or gold over nickel over phos bronze (prior production). Other terminations available at additional cost.

Weight 0.19 – 0.23 g **Ambient temperature** –40°C to +85°C with (40°C rise) Irms current.

Maximum part temperature +125°C (ambient + temp rise). **Derating.**

Storage temperature Component: –40°C to +125°C.

Tape and reel packaging: –40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Packaging 500/7" reel, 1500/13" reel; Plastic tape: 16 mm wide, 0.3 mm thick, 12 mm pocket spacing, 2.1 mm pocket depth

PCB washing Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See [Doc787_PCB_Washing.pdf](#).

| Part number ¹ | Inductance ² ±20% (µH) | DCR max (Ohms) | SRF typ ³ (MHz) | Isat (A) ⁴ | | | Irms (A) ⁵ | |
|--------------------------|--------------------------------------|----------------------|----------------------------------|-----------------------|-------------|-------------|-----------------------|--------------|
| | | | | 10% drop | 20% drop | 30% drop | 20°C rise | 40°C rise |
| MSS6122-472ML_ | 4.7 | 0.065 | 65.0 | 1.44 | 1.66 | 1.82 | 1.60 | 2.30 |
| MSS6122-562ML_ | 5.6 | 0.083 | 60.0 | 1.22 | 1.46 | 1.60 | 1.50 | 2.10 |
| MSS6122-682ML_ | 6.8 | 0.100 | 48.0 | 1.18 | 1.36 | 1.50 | 1.40 | 2.00 |
| MSS6122-822ML_ | 8.2 | 0.120 | 44.0 | 1.12 | 1.24 | 1.36 | 1.30 | 1.80 |
| MSS6122-103ML_ | 10 | 0.150 | 42.0 | 0.98 | 1.10 | 1.20 | 1.20 | 1.70 |
| MSS6122-123ML_ | 12 | 0.176 | 40.0 | 0.97 | 1.06 | 1.14 | 1.13 | 1.60 |
| MSS6122-153ML_ | 15 | 0.210 | 38.0 | 0.85 | 0.97 | 1.04 | 1.06 | 1.50 |
| MSS6122-183ML_ | 18 | 0.280 | 35.0 | 0.78 | 0.89 | 0.97 | 0.99 | 1.40 |
| MSS6122-223ML_ | 22 | 0.310 | 32.0 | 0.64 | 0.75 | 0.82 | 0.92 | 1.30 |
| MSS6122-273ML_ | 27 | 0.350 | 26.0 | 0.62 | 0.71 | 0.77 | 0.85 | 1.20 |
| MSS6122-333ML_ | 33 | 0.460 | 22.0 | 0.60 | 0.69 | 0.74 | 0.77 | 1.10 |
| MSS6122-393ML_ | 39 | 0.540 | 19.0 | 0.50 | 0.59 | 0.64 | 0.70 | 1.00 |
| MSS6122-473ML_ | 47 | 0.680 | 18.0 | 0.47 | 0.55 | 0.60 | 0.63 | 0.90 |
| MSS6122-563ML_ | 56 | 0.740 | 17.0 | 0.43 | 0.50 | 0.54 | 0.56 | 0.80 |
| MSS6122-683ML_ | 68 | 1.000 | 16.0 | 0.40 | 0.46 | 0.50 | 0.49 | 0.70 |
| MSS6122-823ML_ | 82 | 1.200 | 15.0 | 0.37 | 0.43 | 0.46 | 0.42 | 0.60 |
| MSS6122-104ML_ | 100 | 1.370 | 12.5 | 0.32 | 0.37 | 0.40 | 0.35 | 0.50 |

1. Please specify **termination** and **packaging** codes:

MSS6122-104MLC

Termination: L = RoHS compliant matte tin over nickel over phos bronze (current production) or gold over nickel over phos bronze (prior production)

Special order:

T = RoHS tin-silver-copper

(95.5/4/0.5) over gold over nickel over phos bronze or

S = non-RoHS tin-lead (63/37) over gold over nickel over phos bronze.

Packaging: C = 7" machine-ready reel EIA-481 embossed plastic tape (500 per full reel). Quantities less than full reel available: in tape (not machine ready) or with leader and trailer (\$25 charge).

D = 13" machine-ready reel EIA-481 embossed plastic tape. Factory order only, not stocked (1500 per reel per full reel).

B = Less than full reel In an effort to simplify our part numbering system, Coilcraft is eliminating the need for multiple packaging codes. When ordering, simply change the last letter of your part number from B to C.

- Inductance tested at 100 kHz, 0.1 Vrms, 0 Adc using an Agilent/HP 4263B LCR meter or equivalent.
- SRF measured using an Agilent/HP 4191A or equivalent.
- DC current at 25°C that causes the specified inductance drop from its value without current. [Click for temperature derating information.](#)
- Current that causes the specified temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings. [Click for temperature derating information.](#)
- Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

SPICE models
ON OUR WEB SITE OR CD



www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com

UK +44-1236-730595 sales@coilcraft-europe.com

Taiwan +886-2-2264 3646 sales@coilcraft.com.tw

China +86-21-6218 8074 sales@coilcraft.com.cn

Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 640-1 Revised 04/26/22


© Coilcraft Inc. 2022

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.





Shielded Power Inductors – MSS6122



Typical L vs Current

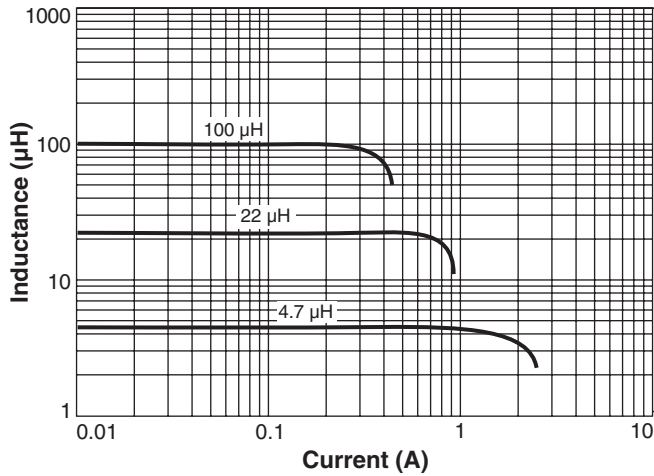


Typical L vs Frequency

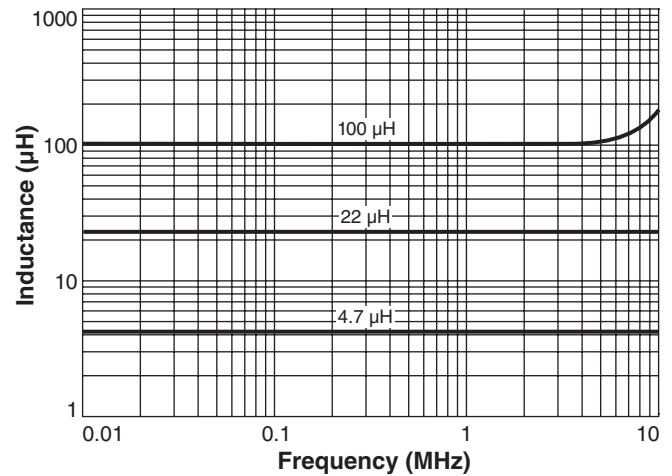

*Dimensions are of the case not including the termination. For maximum overall dimensions including the termination, add 0.016 in / 0,4 mm.

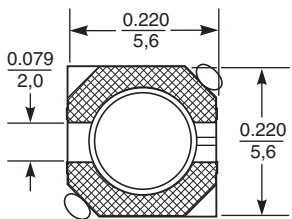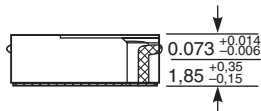

Recommended Land Pattern

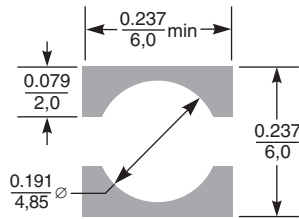

Dimensions are in $\frac{\text{inches}}{\text{mm}}$



US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 640-2 Revised 04/26/22
 © Coilcraft Inc. 2022
 This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.